


100043 3CCT

CARIDA 1200×300 Backlit TP(a) Panel

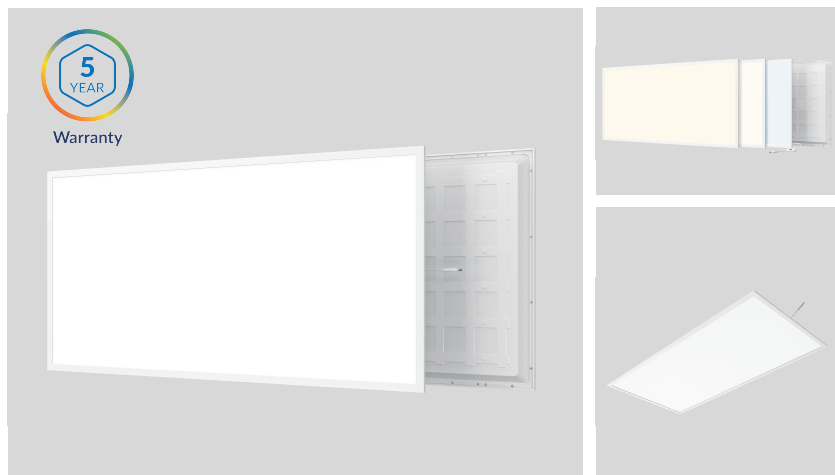

FEATURES

- 3 CCT(Switch from 3000K/4000K/6000K)
- 120lm/w output
- 5 Year warranty
- TP(a) rated
- High-quality integrated back-lit LED chips
- Emergency and dimmable versions available



Carida is a high-performance, back-lit LED panel featuring 3CCT technology, allowing you to switch between 3000K warm white, 4000K cool white, and 6000K daylight white.

Available in both 30W 1200×300 and 50W 1200×600 versions, Carida delivers powerful, uniform illumination and exceptional efficiency — making it a versatile solution for a wide range of commercial, residential, and hospitality environments.

AVAILABLE OPTIONS



Dali
Dimmable



1-10V
Dimmable



Push
Dimmable



Emergency

Code	Description	Wattage	Colour	Lumens
100043	CARIDA 1200x300 Backlit TP(a) Panel - 3CCT	30W	3000/4000/6000K	3500/3600/3700lm
100043- EM	CARIDA 1200x300 Backlit TP(a) Panel 3CCT- EMERGENCY	30W	3000/4000/6000K	3500/3600/3700lm
100043- DD	CARIDA 1200x300 Backlit TP(a) Panel 3CCT- DALI DIM	30W	3000/4000/6000K	3500/3600/3700lm
100043- SD	CARIDA 1200x300 Backlit TP(a) Panel 3CCT- PUSH / SWITCH DIM	30W	3000/4000/6000K	3500/3600/3700lm
100043- AD	CARIDA 1200x300 Backlit TP(a) Panel 3CCT- 1-10V DIM	30W	3000/4000/6000K	3500/3600/3700lm

TECHNICAL SPECIFICATION

LED Type/Qty	SMD2835/60
Lumen Efficacy	120lm/w
Wattage	30W
Colour Temperature	3000K/4000K/6000K
Luminous Flux	3500lm/3600lm/3700lm
UGR Data	UGR >19
Colour Index	Ra>80
Dimming Options Available	1-10v/DALI/PUSH
Input Voltage	AC200-240V/50Hz
Max Driver Current	750mA

0113 426 8300

sales@performance-lightung.co.uk

Unit B8, Astra Business Park,
Parkside Lane, Leeds LS11 5SZ

www.performance-lighting.co.uk



500001 & 500041

Leda 4ft Single & Leda 4ft Single EM3



TECHNICAL SPECIFICATION

Working Voltage	DC27-42V
IP Rating	IP20
Operating Temperature	-15° ~ 50°C
Lumen Maintenance	L80/B10 @ 50,000hrs
Switching Cycles	> 100,000
Power Factor	> 0.9
Fireproof	TP(a)
Driver Manufacturer	Eaglerise
Overall Dimensions	295X1195X32MM
Product Weight (kg)	1.85kg
Minimum Void Requirement	50mm
Method of fix	Ceiling mounting
Origin of manufacturer	China
Primary Running Current (Amp)	0.13A
Class	Class II
Inrush current (Amps)	0.35A
EMC Compliant (EN55015)	Yes
Input Electrical Connections	Terminal block
Thermal Cut Out	No
Insulation Coverage	Cover
Minimum Free Air Space	50mm
LED Life (Hours)	>50000h@Tc=75 °C
Energy Rating	E
Beam Angle	120°
Primary Material	Aluminum
Inner Diffusor	Polycarbonate diffuser
Outer Diffusor	TP(a) diffuser
Heat Sink	Aluminum Frame
Driver Housing	Plastic
Manufactured in accordance to	ISO 9001
CE Marked	Yes
UKCA Marked	Yes

 0113 426 8300

 sales@performance-lightung.co.uk

Unit B8, Astra Business Park,
Parkside Lane, Leeds LS11 5SZ

www.performance-lightung.co.uk

