

# 400043 Emergency & Sensor ORION PRO Bulkhead 4 Power & 3 CCT



## FEATURES

- 4 Power selectable – 8W/12W/16W/20W
- 3 CCT: Switch between 3000K/4000K/6500K
- 4 x 20mm Conduit Side Entry
- IP65 rated
- IK08 impact resistant
- Slimline design
- Easy to install
- 3 hours back up on mains failure
- Sensor options available
- Various bezel options available



IP65



3 CCT



4 Power  
Selectable



IK08  
Rated



The Orion Pro emergency & sensor version features integrated motion detection with corridor function as standard and provides reliable backup lighting in the event of power failure, delivering a minimum of 3 hours emergency operation to support safety and compliance.

With an IP65 rating, it provides reliable performance in both indoor and outdoor environments. Four side conduit entries and a hinged gear tray ensures easy installation and maintenance. Multiple bezel options to suit different applications and aesthetic requirements. Ideal for stairwells, corridors, car parks, and similar applications.

## AVAILABLE OPTIONS



Sensor



Sensor &  
Emergency



Self Test  
Emergency

Code	Description	Wattage	Colour	Lumens
400043	Orion PRO Bulkhead EM & Sensor - 4 Power Selectable	8W/12W/16W/20W	3000/4000/6500K	800-2000lm

## Various Bezels & Colours Available


**Plain:** Black & Chrome, **Eyelid:** Black & White, **Grill:** Black & White



Plain Bezel



Eyelid Bezel



Grill Bezel

0113 426 8300

sales@performance-lighting.co.uk

Unit B8, Astra Business Park,  
Parkside Lane, Leeds LS11 5SZ


www.performance-lighting.co.uk



# 400043 Emergency & Sensor ORION PRO Bulkhead 4 Power & 3CCT

## TECHNICAL SPECIFICATION

Lumen Efficacy	100lm/w
Lumen Maintenance	L70B50
Colour Temperature	3000K/4000K/6500K CCT
Luminous Flux	800lm-2000lm
Colour index	Ra>80
Input Voltage	220-240Vac, 50/60Hz
Driver output Current (max)	150mA
Driver output Voltage	93-133V
Emergency function	120lm
IP Rating	IP65
Operating Temperature	-20°~40°C
Lumen Maintenance	50,000hrs
Switching Cycles	>25,000
Power Factor	>0.5
SDCM	<6
Warranty	5 Years
Beam Angle	115°
Primary Running Current	0.17A
Overall Dimensions	320mm (with Bezel)
Height (mm)	77mm
IK Rating	IK08
Material	PC+ABS
Push Fit Terminal	Yes
Body Colour	White
Class	Class II
Energy Rating (Lightsource)	E
MS Function	Stand By(Corridor Function)

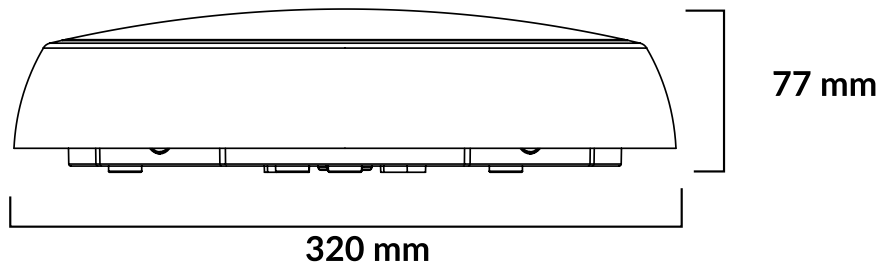

0113 426 8300

sales@performance-lighting.co.uk

Unit B8, Astra Business Park,  
Parkside Lane, Leeds LS11 5SZ

www.performance-lighting.co.uk

