

400040 Standard ORION PRO Bulkhead 4 Power & 3CCT



FEATURES

- 4 Power selectable – 8W/12W/16W/20W
- 3 CCT: Switch between 3000K/4000K/6500K
- 4 x 20mm Conduit Side Entry
- IP65 rated
- IK08 impact resistant
- Slimline Design
- Easy to install
- Microwave sensor & emergency options available
- Various bezel options available



IP65



3 CCT



4 Power
Selectable



IK08
Rated



The Orion Pro bulkhead is a flexible and durable lighting solution, featuring four wattage/power selectable and 3-CCT to suit a wide range of applications.

With an IP65 rating, it provides reliable performance in both indoor and outdoor environments. Four side conduit entries and a hinged gear tray ensures easy installation and maintenance. Multiple bezel options to suit different applications and aesthetic requirements.

Suitable for plant rooms, cupboards, bathrooms, stairwells, corridors, car parks and building perimeters.

AVAILABLE OPTIONS



Emergency



Sensor



Sensor &
Emergency



Self Test
Emergency

Code	Description	Wattage	Colour	Lumens
400040	Orion PRO Bulkhead Standard - 4 Power Selectable	8W/12W/16W/20W	3000/4000/6500K	800-2000lm

Various Bezels & Colours Available


Plain: Black & Chrome, **Eyelid:** Black & White, **Grill:** Black & White



Plain Bezel



Eyelid Bezel

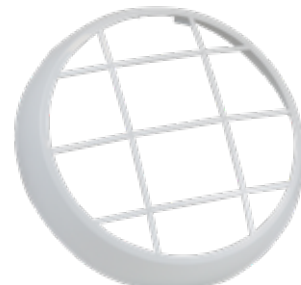

Grill Bezel

0113 426 8300

sales@performance-lighting.co.uk

Unit B8, Astra Business Park,
Parkside Lane, Leeds LS11 5SZ


www.performance-lighting.co.uk



400040 Standard ORION PRO Bulkhead 4 Power & 3 CCT

TECHNICAL SPECIFICATION

Lumen Efficacy	100lm/w
Lumen Maintenance	L70B50
Colour Temperature	3000K/4000K/6500K CCT
Luminous Flux	800lm-2000lm
Colour index	Ra>80
Input Voltage	220-240Vac, 50/60Hz
Driver output Current (max)	150mA
Driver output Voltage	93-133V
Emergency Lumen	N/A
IP Rating	IP65
Operating Temperature	-20°~40°C
Lumen Maintenance	50,000hrs
Switching Cycles	>25,000
Power Factor	>0.5
SDCM	<6
Warranty	5 Years
Beam Angle	115°
Primary Running Current	0.17A
Overall Dimensions	320mm (with Bezel)
Height (mm)	77mm
IK Rating	IK08
Material	PC+ABS
Push Fit Terminal	Yes
Body Colour	White
Class	Class II
Energy Rating (Lightsource)	E

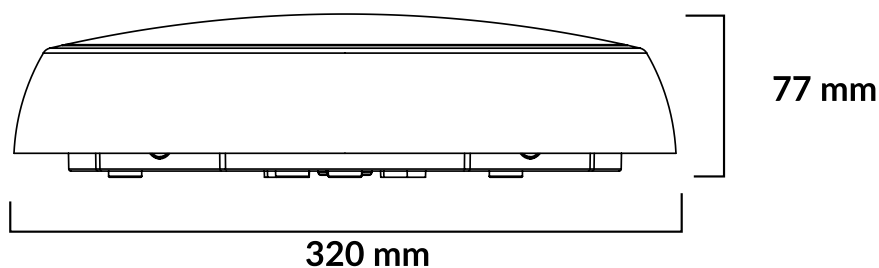

☎ 0113 426 8300

✉ sales@performance-lighting.co.uk

Unit B8, Astra Business Park,
Parkside Lane, Leeds LS11 5SZ

www.performance-lighting.co.uk

