

# 400001 Standard ORION LED Bulkhead Dual Wattage CCT



## FEATURES

- 3-CCT: Switch between 3000K/4000K/6500K
- Dual Wattage – Switch between 12w and 16w
- 5-Year warranty
- IP65 rated
- Slimline Design
- Easy to install
- Emergency and microwave sensor options available



IP65



3CCT



Dual  
Wattage



Orion is our wattage & colour switchable 3-CCT 12 & 16W LED bulkhead fitting. With long life and high lumen output, this bulkhead is ideal for internal and external use, in most domestic and commercial applications.

## AVAILABLE OPTIONS



Emergency



Sensor

Code	Description	Wattage	Colour	Lumens
400001	Orion Bulkhead - Dual Wattage 12/16w – Standard	12/16W	3000, 4000, 6500K	1200/1600lm
100016	Orion Bulkhead POLO Bezel Black	N/A	N/A	N/A
100017	Orion Bulkhead POLO Bezel Chrome	N/A	N/A	N/A

## TECHNICAL SPECIFICATION

LED Type/Qty	SMD2835/182
Lumen Efficacy	100lm/w
Colour Temperature	3000K/4000K/6500K selectable
Luminous Flux	1200lm/1600lm
Colour index	Ra>80
Dimming Options Available	Dali-Dimmable
Input Voltage	220-240Vac, 50/60Hz
Driver output Current (max)	660mA
Driver output Voltage	DC17-24V
IP Rating	IP65
Operating Temperature	-10°- +40°C
Lumen Maintenance	L70/B50 @ 50,000hrs
Switching Cycles	>25,000
Power Factor	>0.9
Warranty	5 Years
Beam Angle	105°
Thermal Cutout	No

0113 426 8300

[sales@performance-lighting.co.uk](mailto:sales@performance-lighting.co.uk)

Unit B8, Astra Business Park,  
Parkside Lane, Leeds LS11 5SZ

[www.performance-lighting.co.uk](http://www.performance-lighting.co.uk)




# 400001 Standard ORION LED Bulkhead Dual Wattage CCT



## TECHNICAL SPECIFICATION

Primary Running Current	0.2A
Energy Rating Range	This product contains a light source of energy class E
Overall Dimensions	320mm
Height (mm)	82.5mm
Product Weight (Kg)	0.85kg
Class	Class 2
IK Rating	IK08
Origin of Manufacturer	China
Driver Manufacturer	Performance Lighting
EMC Compliant (EN55015)	Yes
Construction	Twist & Lock
Primary Material	Plastic
Inner Diffusor	N/A
Driver Housing	Plastic
Standard & Approvals	CE, UKCA
Manufactured in Accordance To	BS EN 60598-2-1
CE Marked	Yes
UKCA Marked	Yes
Input Electrical Connections	N / E / L
Method of fix	Back screw fix or BESA plate mounting
Replaceable (LED only)light source by a professional	yes
Replaceable control gear by a professional	yes

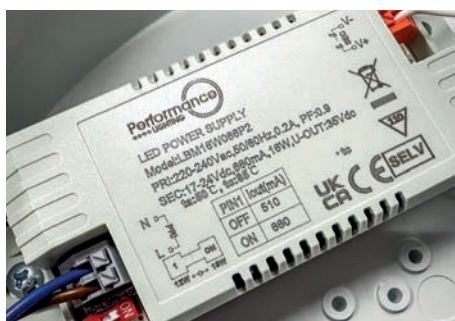

0113 426 8300

[sales@performance-lighting.co.uk](mailto:sales@performance-lighting.co.uk)

Unit B8, Astra Business Park,  
Parkside Lane, Leeds LS11 5SZ

[www.performance-lighting.co.uk](http://www.performance-lighting.co.uk)

